


RV9,11 & RV16 Road Only- Piping Diagram

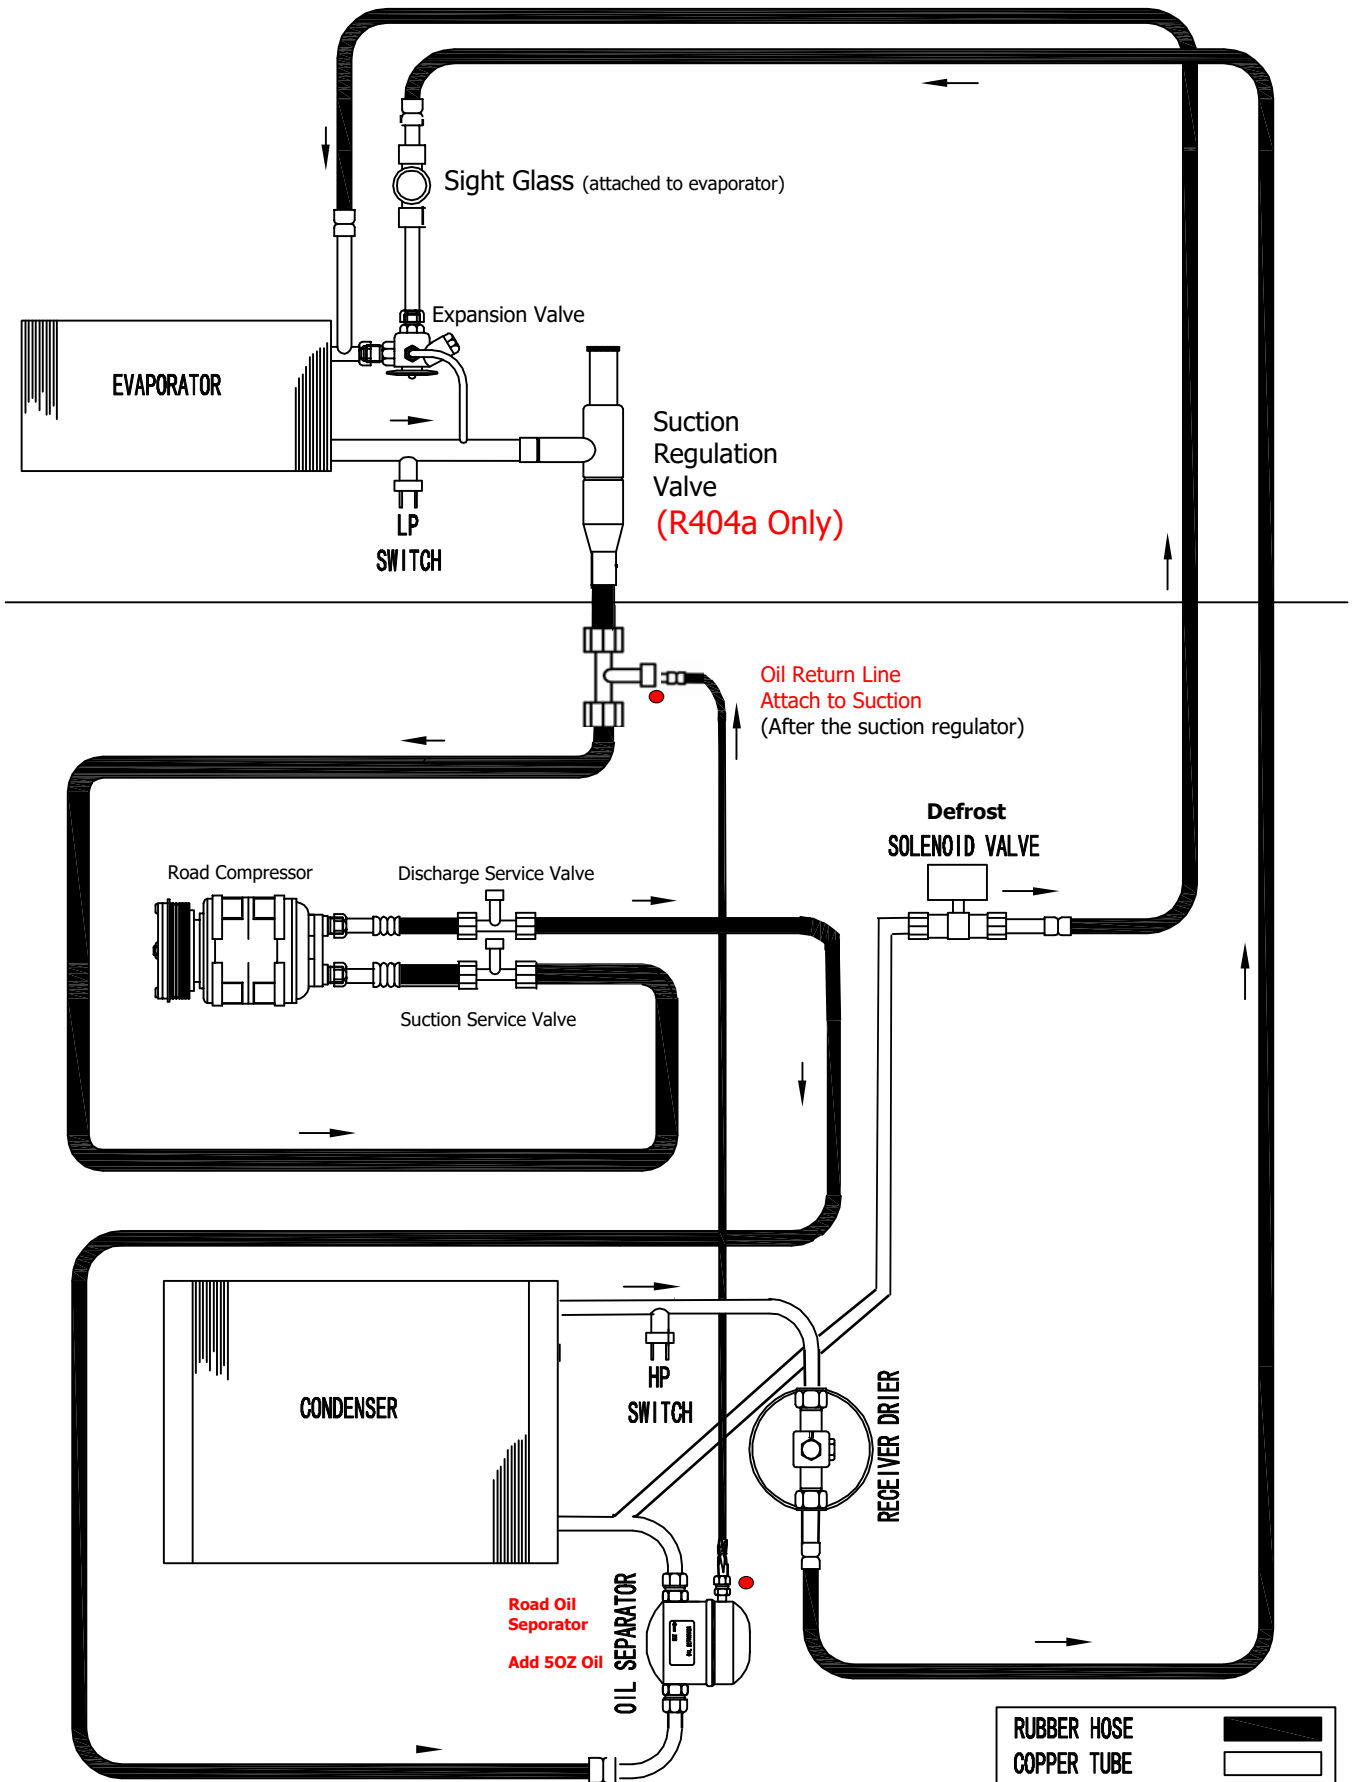

Oil Separator:

1. **R134a** Applications do not require an oil separator
2. **All R404a** Applications **MUST** have an oil separator installed
3. Oil separators should be "primed or filled" with 5 OZ (120ML) of polyester RL68 oil
4. Connect oil return line to evaporator suction line make sure shreader valve is removed from suction line fitting.